

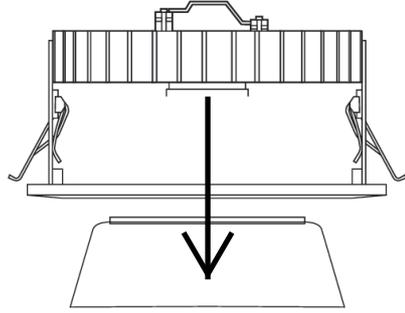
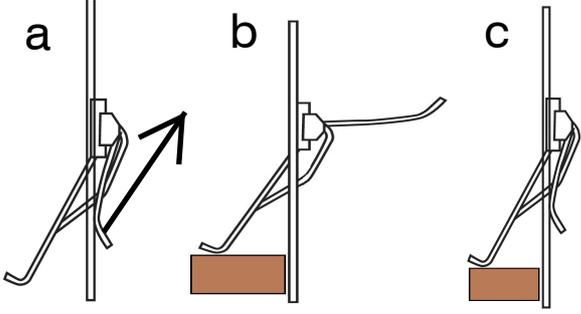
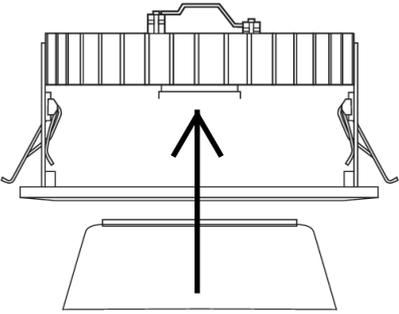
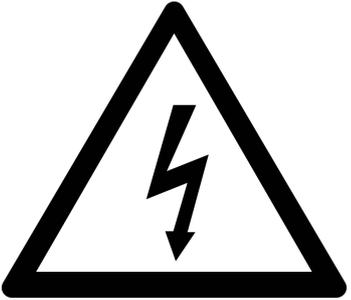


<p><b>1</b></p>  <p>Isolate mains supply before installation!</p>	<p><b>2</b></p>  <p>Cut a Ø176mm circular hole using a holesaw</p>
<p><b>3</b></p> <p>Connect the mains supply (and any dimming cables) to the LED driver supplied with the downlighter.</p>	<p><b>4</b></p>  <p>Remove the reflector</p>
<p><b>5</b></p> <p>Insert the downlighter into the ceiling void, ensuring there is a minimum 50mm space around the heatsink and LED driver. The downlighter must not be covered with any debris or insulating material!</p>	<p><b>6</b></p>  <p>a. Lift clip b. Push spring down to ceiling c. Lock clip</p>
<p><b>7</b></p>  <p>Re-insert the reflector.</p>	<p><b>8</b></p>  <p>Reinstate the mains supply.</p>