


Outdoor Lighting

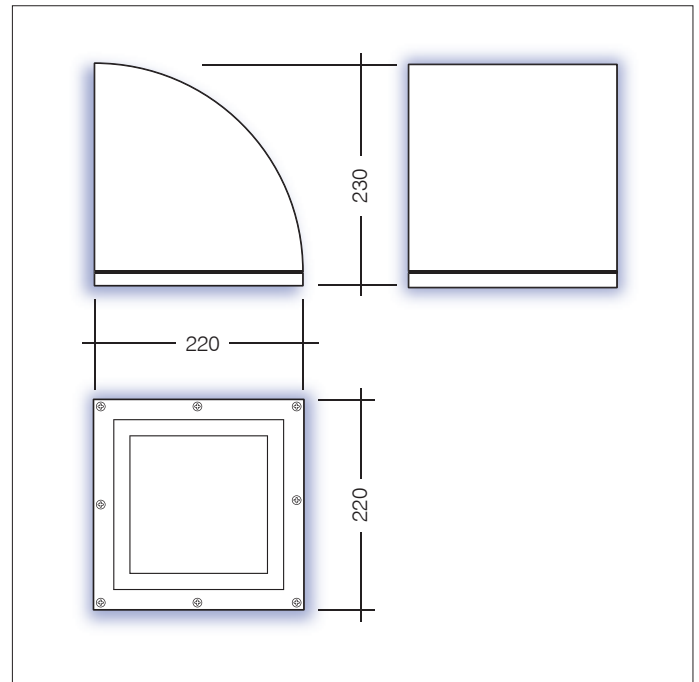

### Key features

- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 124lm/W
- Nominal life-time of 102,000 h (L90/B10)
- Emergency BLF = 276lm

### Options

For Emergency suffix **/EMR**

For DALI dimmable suffix **/DIM**

For Self-test Emergency suffix **/ST**


For Dali Em-pro Emergency suffix **/EMP**

For a Graphite finish suffix **/GRA**

For a Silver finish suffix **/SLV**


### L4 Flood Lens

Part No.	Lm	W	Lm/W
LUN/L4/1300/74	1307	13	94
LUN/L4/2000/74	2199	18	122
LUN/L4/3000/74	3120	26	120
LUN/L4/4000/74	4101	36	114

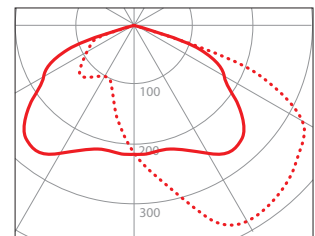

### L6 Wide Pathway

Part No.	Lm	W	Lm/W
LUN/L6/1200/74	1205	13	87
LUN/L6/2000/74	2199	18	122
LUN/L6/3000/74	3120	26	120
LUN/L6/4000/74	4101	35	117

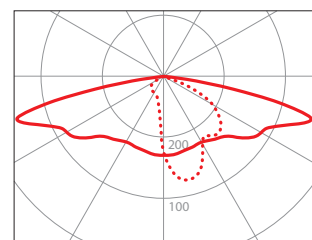

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)