



LED3 Surface

Emergency Bulkhead

Innovation.
Collaboration.
Illumination.



Emergency Lighting

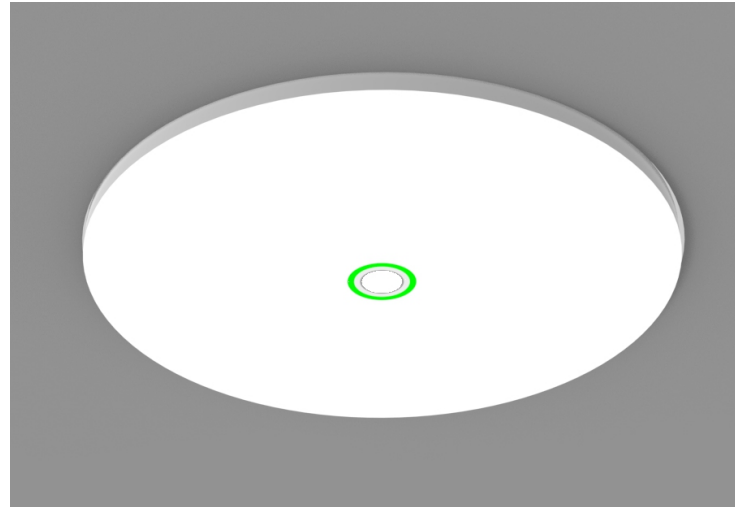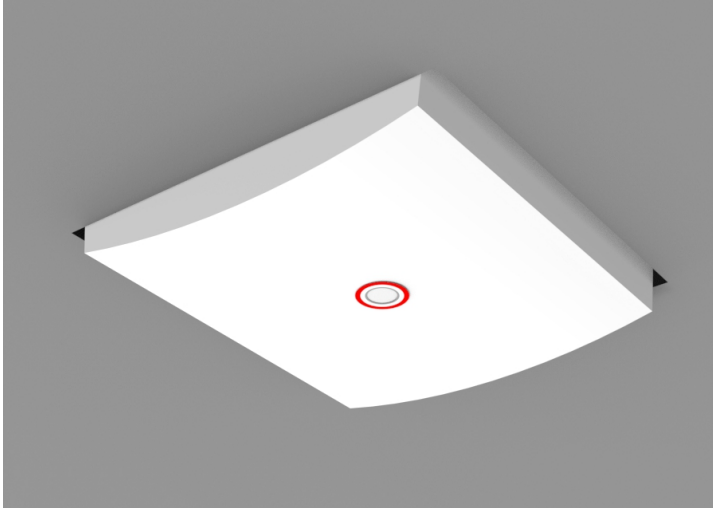

Key Features

- Suitable for Ceiling Recess Applications.
- Plugs and Leads for Simple Installation
- Strain Relief Module
- Can be Supplied without LED Where Required
- Suitable for 40mm or Greater Aperture
- Features Extra Long Life LiFePO4 Batteries
- Weight = 0.42kg / Dali = 0.44kg
- IP20 suitable for internal environments
- CCT 4000k

Options


- For white finish suffix
- For black finish suffix:
- For open area optic suffix
- For corridor optic suffix
- For 3hr self-test emergency suffix
- For 3hr Self-contained DALI emergency suffix
- For remote battery suffix

/WHI
/BLK
/OA
/CO
/ST
/EMP
/REM

i.e. **LED3/CIR/WHI/OA/ST**, LED3 Circular White Bulkhead, Open Area optic c/w 3hr Monitor Self-test Emergency

Open Area Spacing Table

Mounting Height	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	5.2m	4.2m	12.1m	10.3m
3.0m	5.6m	4.4m	13.5m	11.2m
4.0m	6.2m	-	15.4m	12.4m
5.0m	-	-	16.9m	-
6.0m	-	-	17.7m	-

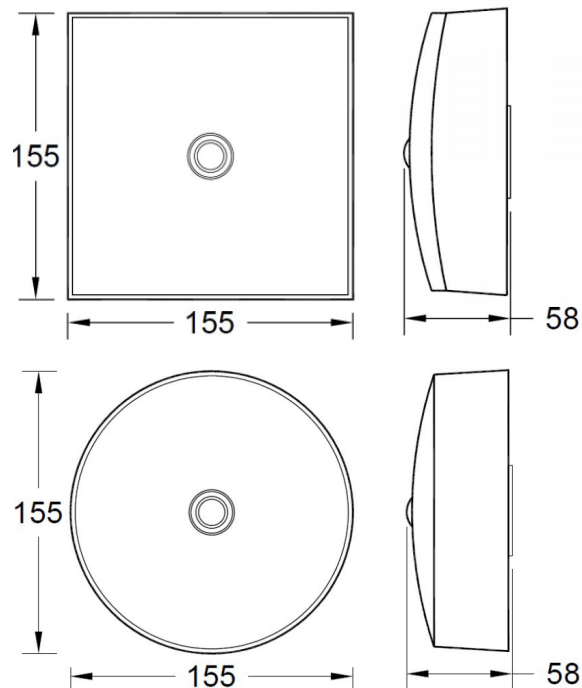

Corridor Spacing Table

Mounting Height	Along Corridor (length)				Along Corridor (width)			
	To Wall		Between Fittings		Between Fittings		To Wall	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	9.9m	8.1m	22.3m	19.7m	7.9m	6.3m	3.1m	2.4m
3.0m	10.7m	8.4m	25.4m	21.5m	8.4m	6.6m	3.3m	2.4m
4.0m	11.8m	0.4m	29.5m	23.5m	9.2m	6.8m	3.4m	0.2m
5.0m	11.5m	-	32.2m	22.9m	9.6m	6.2m	3.1m	-
6.0m	-	-	33.5m	-	9.6m	-	-	-

LED3 Surface


Emergency Bulkhead

Innovation.
Collaboration.
Illumination.



Emergency Lighting

Corridor

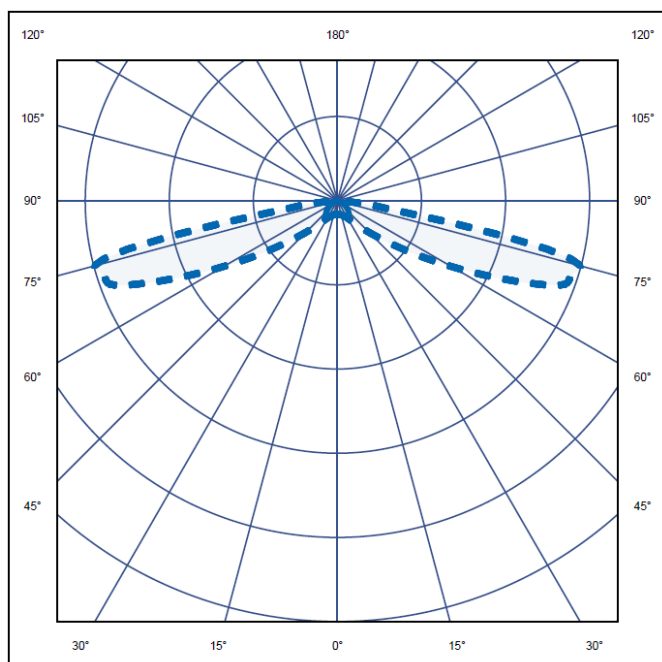

Open Area

