


Hemera Square

Downlighter

Innovation.
Collaboration.
Illumination.



Indoor Lighting

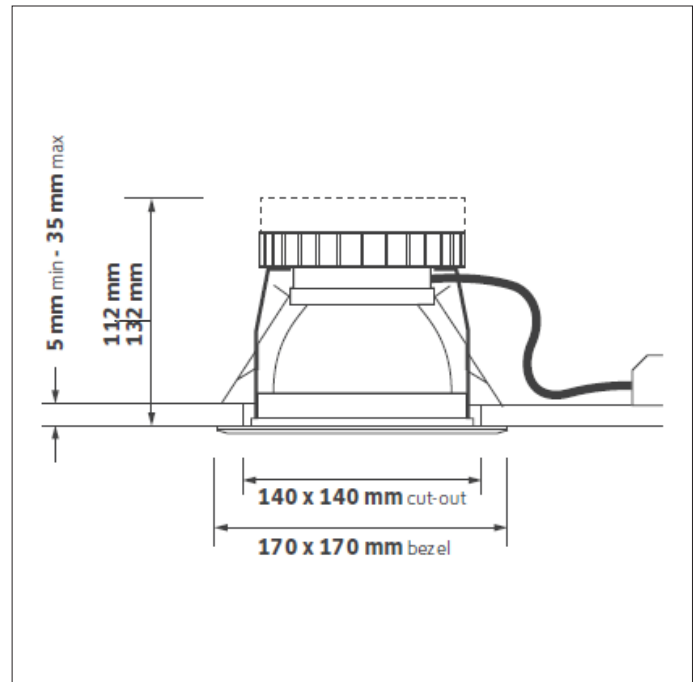

Key features

- IP20 suitable for internal environments
- Efficacy of up to 116lm/W
- Nominal life-time of >50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 291 lm

Options

- For DALI dimmable suffix /DIM
- For Tunable White suffix /TW
- For Casambi enabled suffix /CAS
- For wireless dimmable system suffix /WD
- For 3 hr self-contained emergency suffix /EMR
- For self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e. **HEM/S/1200/4/DIM/ST/SG2** =
Hemera Square, 1200 lumens, 11W, 4000K,
DALI dimmable c/w self-test emergency

Part No.	Lm	W	Lm/W	H(mm)	CCT
HEM/S/1200/3	1009	11	92	132	3000K
HEM/S/1200/4	1090	10	109	132	4000K
HEM/S/2075/3	1743	19	92	132	3000K
HEM/S/2075/4	1889	18	105	132	4000K
HEM/S/3025/3	2675	26	103	132	3000K
HEM/S/3025/4	2902	26	112	132	4000K

For more information, please contact Sales@ldl.lighting

