


LED3/Kit

Emergency Downlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

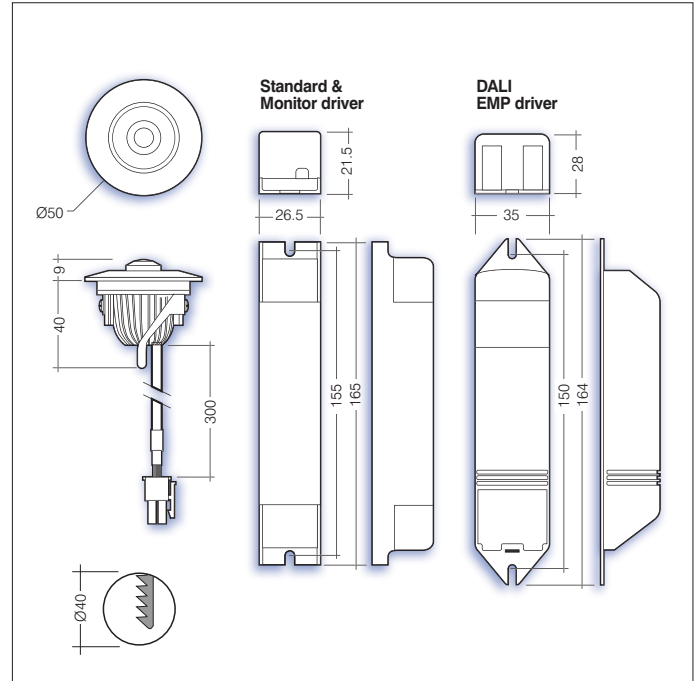

Key features

- Plug and Play with Plugs and Sockets
- Extra Long Life LiFePO4 Batteries
- High output of 267lm
- 1000mA Emergency Output
- Non-Maintained Operation
- Cables with Strain Relief for Simple Installation


Part No.	Lm	W	Halo	IP rating	Battery
LED3/KIT	267	2	Non-dim	IP54	LiFePO4
LED3/KIT/DIM	267	2	Dimming	IP20	LiFePO4

Options


- For white (Ral 9016) finish suffix **/W**
- For black (Ral 9005) finish suffix **/B**
- For open Area optic suffix **/OA**
- For corridor optic suffix **/CO**
- For self-test emergency suffix **/ST**
- For DALI emergency suffix **/EMP**
- For wireless addressable emergency suffix **/WAE**
- For IP54 Rating **/IP**

i.e. LED3 Kit, white, open area optic/P54,3hr self-test emergency
= **LED3/KIT/W/OA/IP/ST**

Corridor

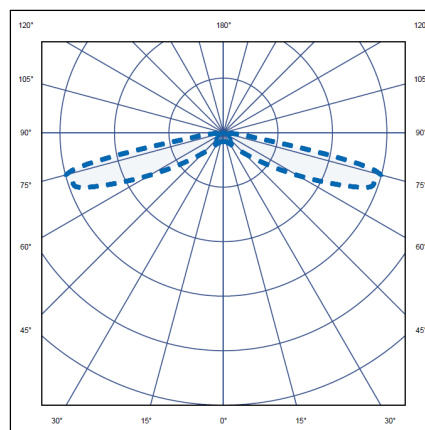

Open Area

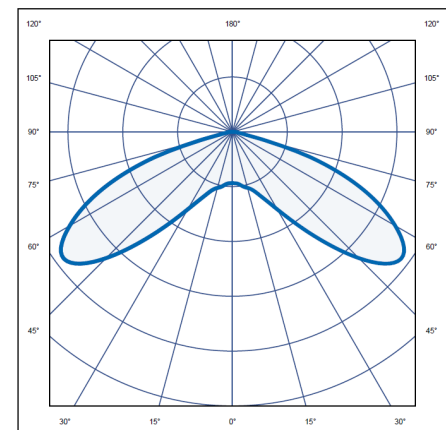

Indoor Lighting

Open Area Spacing Table

Mounting Height	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	5.4m	4.5m	12.5m	10.7m
3.0m	5.9m	4.7m	13.9m	11.7m
4.0m	6.6m	-	16.2m	13.1m
5.0m	0.3m	-	17.7m	0.5m
6.0m	6.9m	-	18.7m	-

Corridor Spacing Table

Mounting Height	Along Corridor (length)				Along Corridor (width)			
	To Wall		Between Fittings		Between Fittings		To Wall	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
2.5m	9.9m	8.1m	22.3m	19.7m	7.9m	6.3m	3.1m	2.4m
3.0m	10.7m	8.4m	25.4m	21.5m	8.4m	6.6m	3.3m	2.4m
4.0m	11.8m	0.4m	29.5m	23.5m	9.2m	6.8m	3.4m	0.2m
5.0m	11.5m	-	32.2m	22.9m	9.6m	6.2m	3.1m	-
6.0m	-	-	33.5m	-	9.6m	-	-	-