



Indoor Lighting

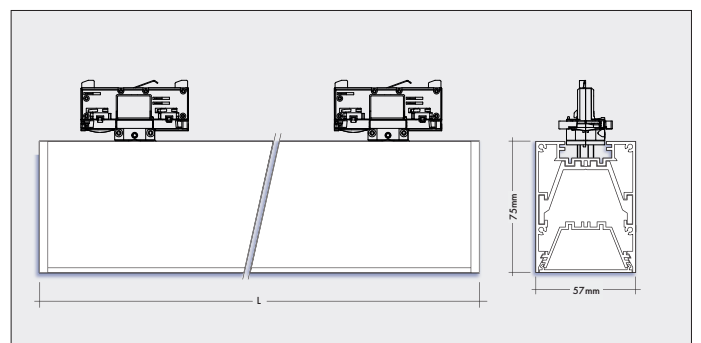

Key Features

- Body and gear tray - aluminium extrusion
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- IP20 as Standard, IP44 available on request
- Lengths available: 570mm, 850mm, & 1130mm.
- Modular Millie - coming soon

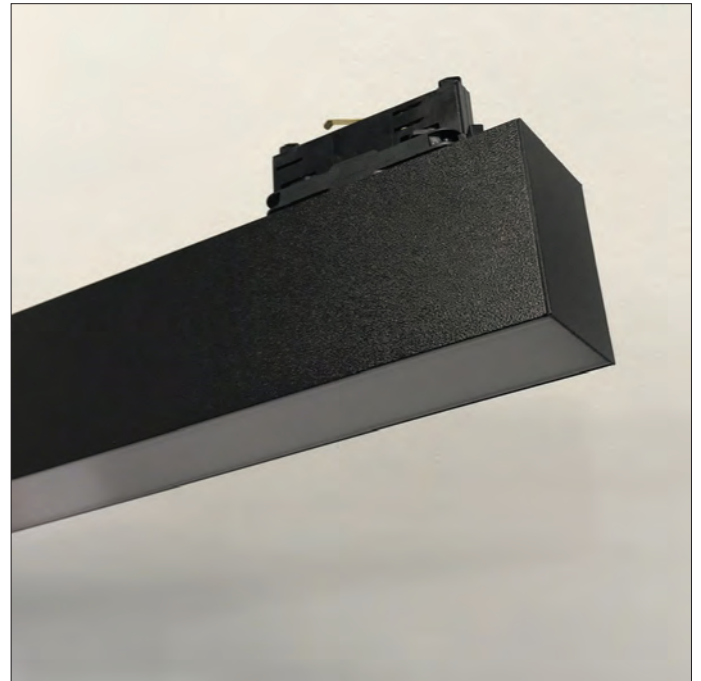


Millie

Opal Frosted Diffuser

Innovation.
Collaboration.
Illumination.



Indoor Lighting

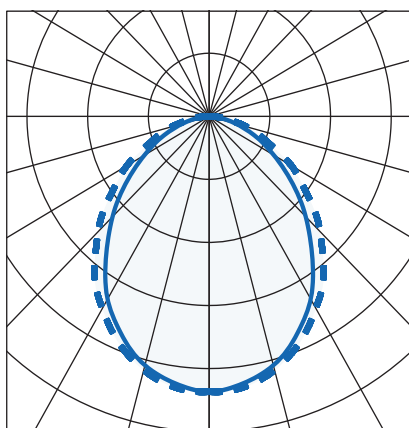


Direct only					
Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/OP/630/4	633	6	108	2.5kg	570
MIL/T/5/OP/940/4	944	8	113	2.5kg	570
MIL/T/5/OP/1250/4	1250	11	115	2.5kg	570
MIL/T/8/OP/950/4	950	8	112	3.2kg	850
MIL/T/8/OP/1420/4	1416	12	119	3.2kg	850
MIL/T/8/OP/1880/4	1876	16	121	3.2kg	850
MIL/T/11/OP/1270/4	1265	11	117	4.4kg	1130
MIL/T/11/OP/1890/4	1887	15	124	4.4kg	1130
MIL/T/11/OP/2500/4	2499	20	126	4.4kg	1130

Other outputs are available on request.

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE
- i.e.: Millie, Track, 570mm, opal diffuser, 944 lumens, 8W, 4000K, black RAL 9005 finish = MIL/T/5/OP/940/4/BLK

Indoor Lighting

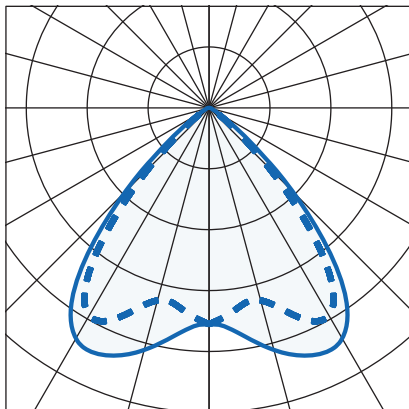

Direct only


Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/90/510/4	510	4	115	2.7kg	570
MIL/T/5/90/1000/4	1004	8	119	2.7kg	570
MIL/T/5/90/1490/4	1488	12	120	2.7kg	570
MIL/T/8/90/770/4	766	7	116	3.4kg	850
MIL/T/8/90/1510/4	1507	12	121	3.4kg	850
MIL/T/8/90/2230/4	2234	18	123	3.4kg	850
MIL/T/11/90/1020/4	1021	8	117	4.5kg	1130
MIL/T/11/90/2010/4	2007	14	124	4.5kg	1130
MIL/T/11/90/2980/4	2975	20	126	4.5kg	1130

Other outputs are available on request.

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE
- i.e.: Millie, Track, 1130mm, 90° optic, 2007 lumens, 14W, 4000K, black RAL 9005 finish, Casambi enabled = MIL/T/11/90/2010/4/BLK/CAS

Indoor Lighting

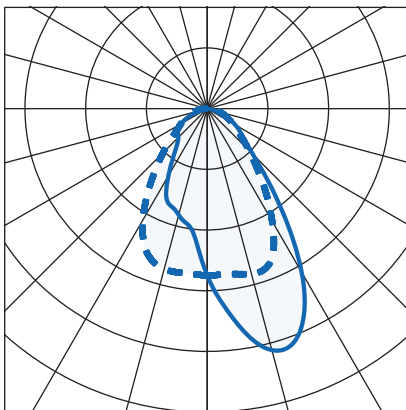


Direct only					
Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/AS/710/4	712	6	122	2.7kg	570
MIL/T/5/AS/1080/4	1078	8	129	2.7kg	570
MIL/T/5/AS/1410/4	1414	11	130	2.7kg	570
MIL/T/8/AS/1070/4	1068	8	126	3.4kg	850
MIL/T/8/AS/1610/4	1617	12	136	3.4kg	850
MIL/T/8/AS/2120/4	2121	16	137	3.4kg	850
MIL/T/11/AS/1420/4	1424	11	132	4.5kg	1130
MIL/T/11/AS/2160/4	2156	15	142	4.5kg	1130
MIL/T/11/AS/2830/4	2827	20	142	4.5kg	1130

Other outputs are available on request.

Options

- 4000K supplied as standard /4
 - For 3000K suffix /3
 - For white RAL 9003 finish suffix /WHI
 - For black RAL 9005 finish suffix /BLK
 - For grey RAL 9006 finish suffix /GRY
 - For DALI dimmable system suffix /DIM
 - For Casambi enabled system suffix /CAS
 - For wireless DALI suffix /WD
 - For 3hr integral emergency suffix /EMR
 - For 3hr self-test emergency suffix /ST
 - For DALI addressable emergency suffix /EMP
 - For wireless DALI addressable emergency /WAE
- i.e.: Millie, Track, 1130mm, asymmetric optic, 2827 lumens, 20W, 4000K, grey RAL 9006 finish, DALI dimmable = **MIL/R/11/AS/2830/4/GRY/DIM**

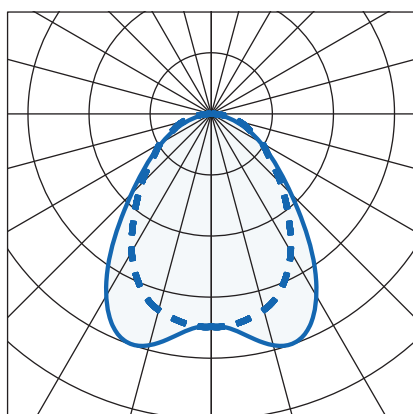

Direct only

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/DA/690/4	693	6	118	2.7kg	570
MIL/T/5/DA/1030/4	1035	8	124	2.7kg	570
MIL/T/5/DA/1370/4	1372	11	126	2.7kg	570
MIL/T/8/DA/1040/4	1040	8	123	3.4kg	850
MIL/T/8/DA/1550/4	1553	12	131	3.4kg	850
MIL/T/8/DA/2060/4	2058	16	133	3.4kg	850
MIL/T/11/DA/1390/4	1386	11	128	4.5kg	1130
MIL/T/11/DA/2070/4	2069	15	136	4.5kg	1130
MIL/T/11/DA/2740/4	2744	20	138	4.5kg	1130

Other outputs are available on request.

Options

- 4000K supplied as standard /4
 - For 3000K suffix /3
 - For white RAL 9003 finish suffix /WHI
 - For black RAL 9005 finish suffix /BLK
 - For grey RAL 9006 finish suffix /GRY
 - For DALI dimmable system suffix /DIM
 - For Casambi enabled system suffix /CAS
 - For wireless DALI suffix /WD
 - For 3hr integral emergency suffix /EMR
 - For 3hr self-test emergency suffix /ST
 - For DALI addressable emergency suffix /EMP
 - For wireless DALI addressable emergency /WAE
- i.e.: Millie, Track, 1130mm, double asymmetric optic, 2744 lumens, 20W, 4000K, grey RAL 9006 finish, DALI dimmable = **MIL/R/11/DA/2740/4/GRY/DIM**