


Indoor Lighting

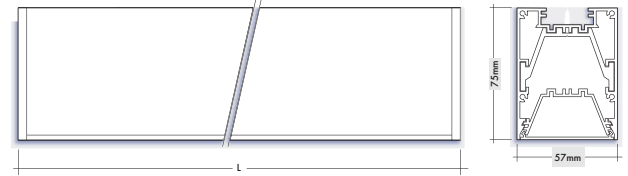

Overview

The Millie linear LED luminaire is manufactured from extruded aluminium and is available with either an opal polycarbonate diffuser or with optics fitted over the LEDs.

The luminaires can be ceiling mounted, suspended or wall mounted and can be fitted as individual fixtures or joined together as a linear, continuous lighting system.

Various options are available including fixed output, DALI dimmable and smart wireless system such as Casambi and My Mesh, as well as integral emergency, Monitor self-test and DALI addressable emergency. There are three colour coated finishes available as standard, white, black and grey.


Features

- Efficacy of up to 161lm/W
- Nominal life-time of 78,000 hours L80/B10
- 90° Low glare optic 54,000 hours L80/B10
- Colour stability with 3 step MacAdam
- Body and gear tray - aluminium extrusion
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- IP20 as Standard, IP44 available on request
- Lengths available: 570mm 850mm 1130mm 1410mm 1690mm 1970mm 2250mm 2530mm 2810mm 3090mm 3370mm.

Fitting Lengths (mm)



Indoor Lighting

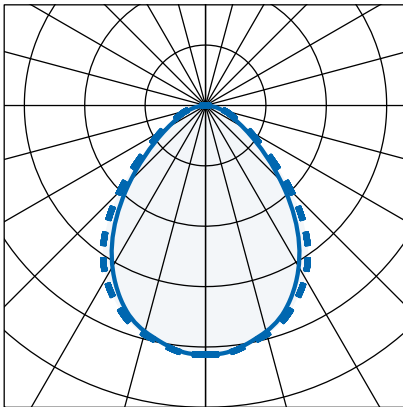

Direct only					
Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/MP/950/4	949	9	102	2.6kg	1130
MIL/S/11/MP/1190/4	1189	11	110	2.6kg	1130
MIL/S/11/MP/2350/4	2349	20	118	2.6kg	1130
MIL/S/16/MP/1240/4	1239	11	109	3.8kg	1690
MIL/S/16/MP/1970/4	1967	16	120	3.8kg	1690
MIL/S/16/MP/3750/4	3754	30	125	3.8kg	1690
MIL/S/22/MP/1900/4	1898	16	115	5.2kg	2250
MIL/S/22/MP/2380/4	2378	20	120	5.2kg	2250
MIL/S/22/MP/4700/4	4698	37	127	5.2kg	2250

Options

- 4000K supplied as standard
- For 3000K suffix
- For white RAL 9003 finish suffix
- For black RAL 9005 finish suffix
- For grey RAL 9006 finish suffix
- For DALI dimmable system suffix
- For Casambi enabled system suffix
- For wireless DALI suffix
- For 3hr integral emergency suffix
- For 3hr Monitor self-test emergency suffix
- For DALI addressable emergency suffix
- For wireless DALI addressable emergency

- /4
- /3
- /WHI
- /BLK
- /GRY
- /DIM
- /CAS
- /WD
- /EMR
- /MON
- /EMP
- /WAE

Other lengths and outputs are available on request.


Accessories

- Suspended / Surface end cap
- Wire suspension kit (2m)
- Wall mounting bracket
- Coupler

- MIL/ECS
- MIL/WIRE
- MIL/WALL
- MIL/CPLR

- i.e.: Millie, Suspended/Surface, 1690mm, microprism diffuser, 3750 lumens, 30W, 4000K, black RAL 9005 finish c/w 3 hr emergency = **MIL/S/16/MP/3750/4/BLK/EMR**

Indoor Lighting

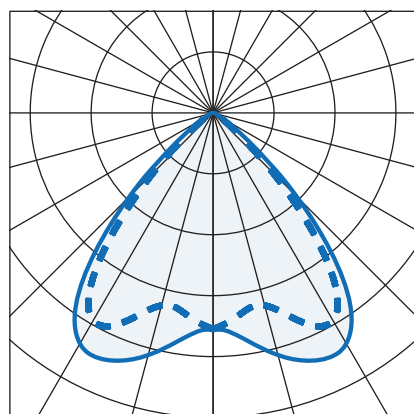

Direct only						
Part No.	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/S/11/90/1020/4	1021	8	121	427	2.8kg	1130
MIL/S/11/90/2010/4	2007	14	146	427	2.8kg	1130
MIL/S/11/90/2980/4	2975	20	152	427	2.8kg	1130
MIL/S/16/90/1550/4	1553	11	139	430	4.1kg	1690
MIL/S/16/90/3060/4	3056	19	159	430	4.1kg	1690
MIL/S/16/90/4520/4	4520	28	161	430	4.1kg	1690
MIL/S/22/90/2070/4	2071	14	140	431	5.6kg	2250
MIL/S/22/90/4010/4	4014	24	141	431	5.6kg	2250
MIL/S/22/90/5950/4	5950	40	141	431	5.6kg	2250

Other lengths and outputs are available on request.

Options


- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr Monitor self-test emergency suffix /MON
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE

Accessories

- Suspended / Surface end cap MIL/ECS
- Wire suspension kit (2m) MIL/WIRE
- Wall mounting bracket MIL/WALL
- Coupler MIL/CPLR

- i.e.: Millie, Suspended/Surface, 1130mm, 90° optic, 2007 lumens, 14W, 4000K, black RAL 9005 finish, Casambi enabled = MIL/S/11/90/2010/4/BLK/CAS

Indoor Lighting

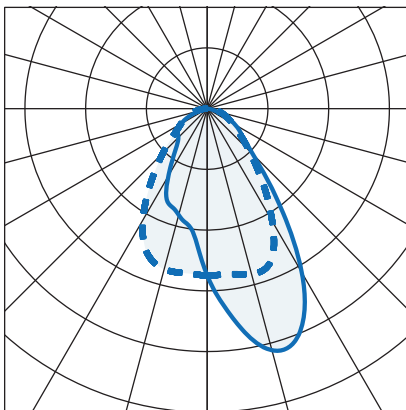

Direct only					
Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/AS/1420/4	1424	11	132	2.8kg	1130
MIL/S/11/AS/2160/4	2156	15	142	2.8kg	1130
MIL/S/11/AS/2830/4	2827	20	142	2.8kg	1130
MIL/S/16/AS/2140/4	2145	15	144	4.1kg	1690
MIL/S/16/AS/3260/4	3260	22	151	4.1kg	1690
MIL/S/16/AS/4410/4	4411	29	154	4.1kg	1690
MIL/S/22/AS/2850/4	2848	19	150	5.6kg	2250
MIL/S/22/AS/4310/4	4312	28	155	5.6kg	2250
MIL/S/22/AS/5650/4	5654	37	153	5.6kg	2250

Other lengths and outputs are available on request.

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr Monitor self-test emergency suffix /MON
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE



Accessories

- Suspended / Surface end cap
- Wire suspension kit (2m)
- Wall mounting bracket
- Coupler

MIL/ECS
MIL/WIRE
MIL/WALL
MIL/CPLR

- i.e.: Millie, Suspended/Surface, 1130mm, asymmetric optic, 2827 lumens, 20W, 4000K, grey RAL 9006 finish, DALI dimmable = **MIL/S/11/AS/2830/4/GRY/DIM**

Indoor Lighting

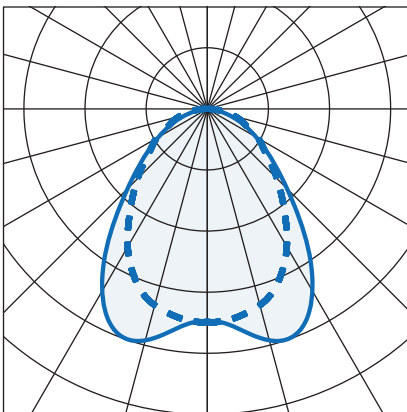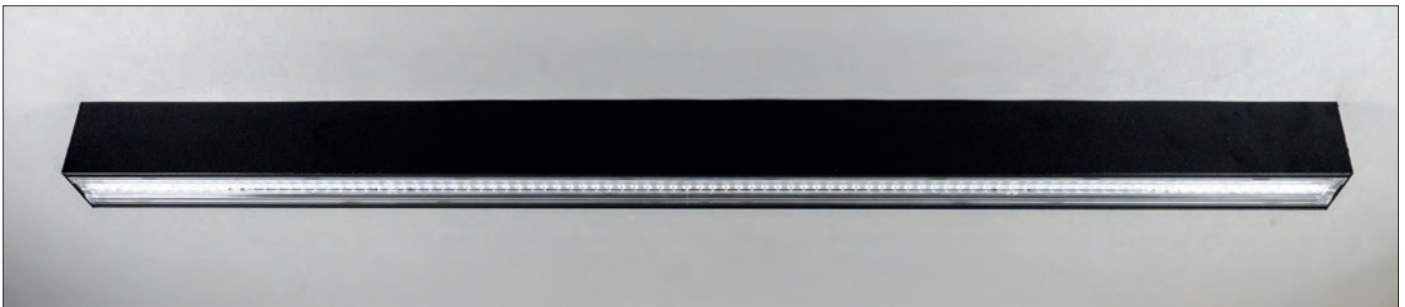

Direct only

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/DA/1390/4	1386	11	128	2.8kg	1130
MIL/S/11/DA/2070/4	2069	15	136	2.8kg	1130
MIL/S/11/DA/2740/4	2744	20	138	2.8kg	1130
MIL/S/16/DA/2200/4	2200	15	148	4.1kg	1690
MIL/S/16/DA/3280/4	3282	22	152	4.1kg	1690
MIL/S/16/DA/4340/4	4343	29	152	4.1kg	1690
MIL/S/22/DA/2770/4	2772	19	146	5.6kg	2250
MIL/S/22/DA/4140/4	4138	28	149	5.6kg	2250
MIL/S/22/DA/5490/4	5488	37	148	5.6kg	2250

Other lengths and outputs are available on request.

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For white RAL 9003 finish suffix /WHI
- For black RAL 9005 finish suffix /BLK
- For grey RAL 9006 finish suffix /GRY
- For DALI dimmable system suffix /DIM
- For Casambi enabled system suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr Monitor self-test emergency suffix /MON
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE

Accessories

- Suspended / Surface end cap MIL/ECS
- Wire suspension kit (2m) MIL/WIRE
- Wall mounting bracket MIL/WALL
- Coupler MIL/CPLR

- i.e.: Millie, Suspended/Surface, 1130mm, double asymmetric optic, 2744 lumens, 20W, 4000K, grey RAL 9006 finish, DALI dimmable = MIL/S/11/DA/2740/4/GRY/DIM