


COLUMNS & ACCESSORIES

C3/76R

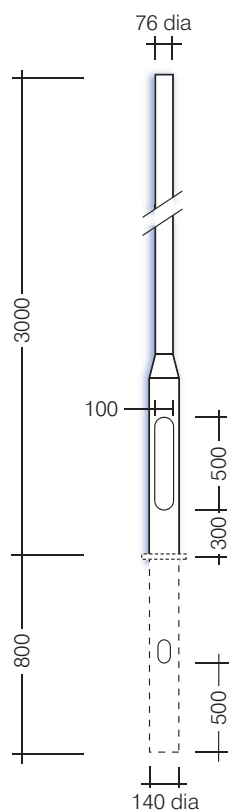


C3/76R - 3 metre rooted

Description	Max weight kg	Max wind area	
		k 1.5m ²	k 1.8m ²
Column	27	-	-
Post top	40	1.32	1.09
0.3m bracket	20	0.69	0.58
0.5m bracket	20	0.47	0.39
0.75m bracket	20	0.30	0.24


C4/76R - 4 metre rooted

Description	Max weight kg	Max wind area	
		k 1.5m ²	k 1.8m ²
Column	32	-	-
Post top	40	0.76	0.62
0.3m bracket	20	0.62	0.50
0.5m bracket	20	0.43	0.36
0.75m bracket	20	0.27	0.22

C4/76R

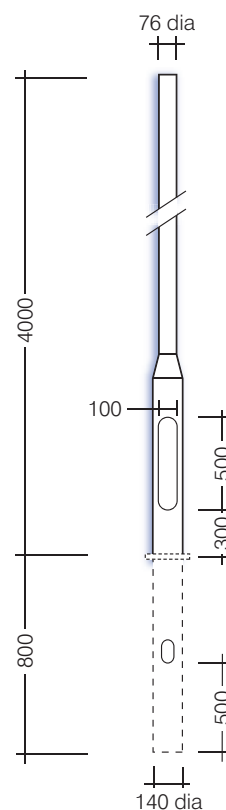

C5/76R

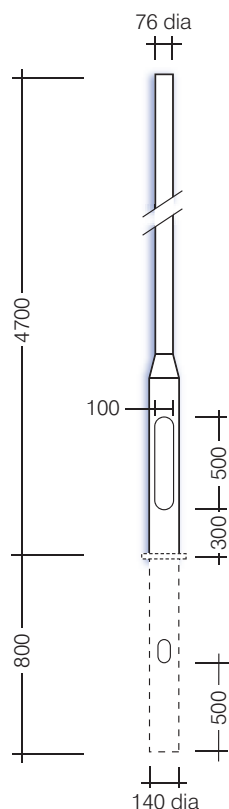


C5/76R - 5 metre rooted

Description	Max weight kg	Max wind area	
		k 1.5m ²	k 1.8m ²
Column	37	-	-
Post top	40	0.53	0.42
0.3m bracket	20	0.46	0.35
0.5m bracket	20	0.37	0.31
0.75m bracket	20	0.25	0.20

C6/76R - 6 metre rooted


Description	Max weight kg	Max wind area	
		k 1.5m ²	k 1.8m ²
Column	45	-	-
Post top	40	0.32	0.23
0.3m bracket	20	0.28	0.20
0.5m bracket	20	0.26	0.18
0.75m bracket	20	0.23	0.16

C6/76R

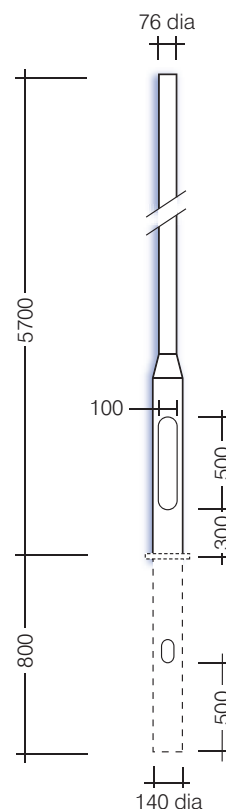

COLUMNS & ACCESSORIES

C6/89RHD

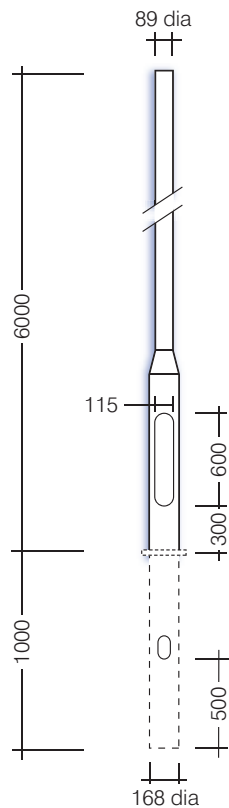


C6/89RHD - 6 metre rooted heavy duty

Description	Max weight kg	Max wind area		
		k1.5m ²	k1.8m ²	k2.2m ²
Column	65	-	-	-
Post top	40	1.14	0.92	0.73
0.5m bracket	20	1.03	0.83	0.65
1.0m bracket	20	0.67	0.55	0.44
1.5m bracket	20	0.42	0.34	0.22


C8/89R - 8 metre rooted

Description	Max weight kg	Max wind area		
		k1.5m ²	k1.8m ²	k2.2m ²
Column	80	-	-	-
Post top	40	0.35	0.35	0.29
0.5m bracket	20	0.42	0.36	0.26
1.0m bracket	20	0.39	0.31	0.21
1.5m bracket	17	0.34	0.26	0.17

C8/89R

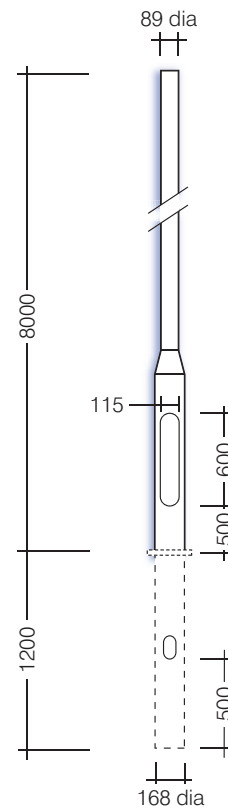

C8/114RMD

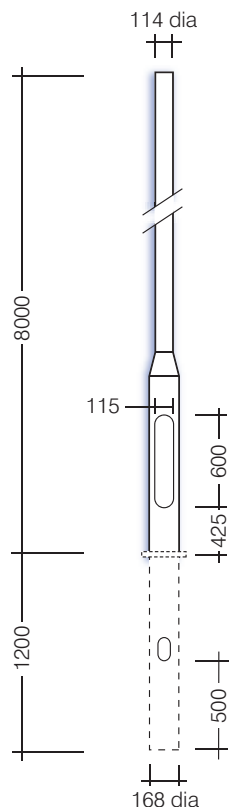

C8/114RMD - 8 metre rooted medium duty

Description	Max weight kg	Max wind area		
		k1.5m ²	k1.8m ²	k2.2m ²
Column	98	-	-	-
Post top	40	0.79	0.63	0.49
0.5m bracket	20	0.66	0.53	0.40
1.0m bracket	20	0.52	0.40	0.30
1.5m bracket	20	0.39	0.31	0.23


C8/114RHD - 8 metre rooted heavy duty

Description	Max weight kg	Max wind area		
		k1.5m ²	k1.8m ²	k2.2m ²
Column	113	-	-	-
Post top	40	1.03	0.97	0.77
0.5m bracket	20	1.09	0.89	0.70
1.0m bracket	20	0.62	0.51	0.41
1.5m bracket	20	0.39	0.32	0.25

Other Columns and options are available, consult our sales office for more info.

For Flange Mounted options exchange **R** for **FP**
ie **C6/76FP 6m Flange Mounted Column**

C8/114RHD

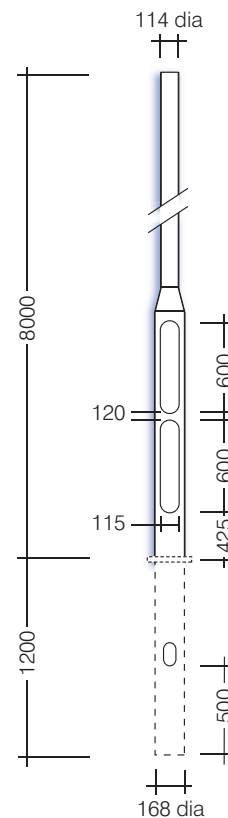

COLUMNS & ACCESSORIES

To compliment the range of columns there is a range of column accessories and brackets. The range includes brackets suitable for side entry and top entry lanterns along with general purpose floodlights.

OR1/76/300/34

Single 300m long outreach bracket, 34mm dia suitable for 76mm shaft column.

OR2/76/300/34

Twin 300m long outreach bracket, 34mm dia suitable for 76mm shaft column.

Other options available on request see table below.

Part numbers generated as follows:

Outreach	Number of ways	Column shaft size (mm)	Length of outreach (mm)	Outreach diameter (mm)
OR	1	76	300	34

FB1/76

Single floodlight bracket suitable for 76mm shaft column.

FB2/76

Twin floodlight bracket suitable for 76mm shaft column.

FB3/76/IN

Three way in line floodlight bracket suitable for 76mm shaft column.

FB3/76/120DEG

Three way 120 deg floodlight bracket suitable for 76mm shaft column.

FB4/76/2UD

Four way 2 up/2 down floodlight bracket suitable for 76mm shaft column.

FB4/76/NSEW


Four way NSEW floodlight bracket suitable for 76mm shaft column.

Other options available on request see table below.


Part numbers generated as follows:

Floodlight Bracket	Number of ways	Column shaft size (mm)	Configuration
FB	2	89	NSEW


Out reach side entry brackets




General purpose floodlight brackets



Flange Base Details



4 x m16 J Bolt Fixings
C3/76F – C6/76F

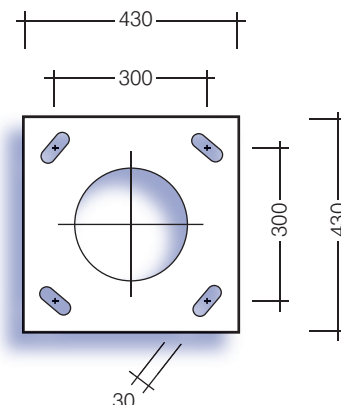

4 x m24 J Bolt Fixings
C6/89FHD – C8/114FHD

